


REV	DESCRIPTION	DATE	ECO	APPR
A	Register drawing	20. 7.01		

NOTE

1. Specification
 - 1.1 Frequency range : DC ~ 18GHz
 - 1.2 Impedance : 50 Ohm Nom.
 - 1.3 VSWR : 1.20 Max.
 - 1.4 Operating temperature : -45°C ~ 125°C
2. Material and Finish
 - 2.1 Center contact : Gold plated Beryllium-copper
 - 2.2 Body, Coupling nut, Lock ring : Passivated Stainless-steel
 - 2.3 Insulator : PTFE
 - 2.4 Gasket : Silicone rubber
3. RoHs Compliance : Directive (EU) 2015/863

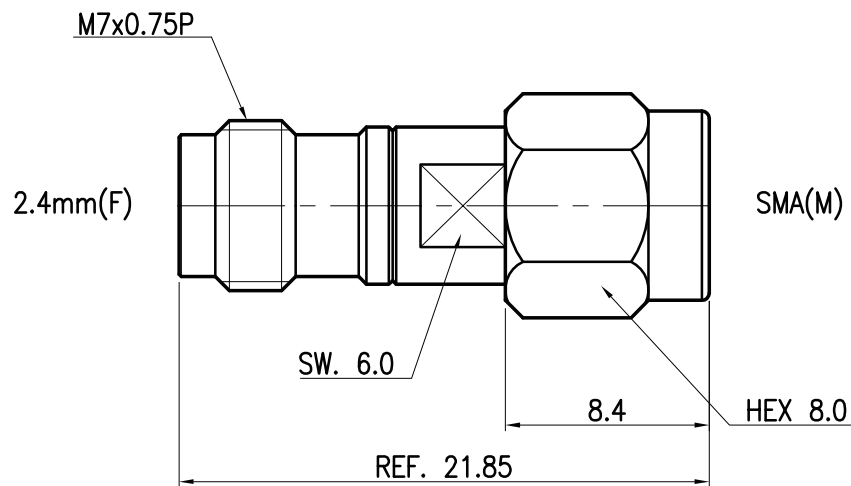

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE :

1 PLACE DECIMAL ± 0.20 mm	2 PLACE DECIMAL ± 0.10 mm	ANGLES ± 1°	1.6 a		
------------------------------	------------------------------	----------------	-------	--	--

REMOVE BURRS. BREAK SHARP EDGES

MATERIAL SEE NOTE 2.	DRAWN DATE 2020. 7. 01	TITLE BETWEEN ADAPTOR 2.4mm FEMALE TO SMA MALE		
FINISH SEE NOTE 2.	ENGINEER DATE 2020. 7. 01		SCALE N.S	SHEET 1 of 1
REFERENCE	APPROVED DATE 2020. 7. 01		DRAWING No. AD33075-242-A01	REV. A
CAD FILE CAD:/ADAPTOR/2.4mm TO SMA		DWG SIZE A4		

