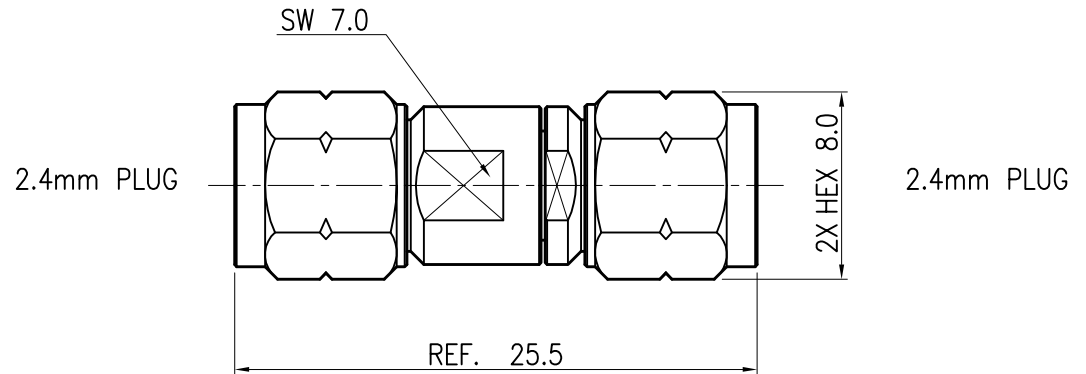





Specification

1. Electrical data
 - 1.1 Impedance : 50 Ohm Nom.
 - 1.2 Frequency range : DC ~ 40GHz
 - 1.3 VSWR : 1.20 Max.
2. Mechanical data
 - 2.1 Durability : 500 cycles Min.
 - 2.2 Temperature range : -45°C ~ 85°C
3. Material and Finish
 - 3.1 Body : Passivated Stainless steel
 - 3.2 Center Contact : Gold plated Beryllium-copper
 - 3.3 Insulator : Ultem-1000
 - 3.4 Coupling nut : Passivated Stainless steel
 - 3.5 Lock ring : Passivated STainless steel
4. 2011/65/EU(RoHS) compliant

REV	DESCRIPTION	DATE	ECO	APPR
A	Register drawing	17.11.15		



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE :

1 PLACE DECIMAL ± 0.20 mm 2 PLACE DECIMAL ± 0.10 mm ANGLES ± 1° 1.6 a   

REMOVE BURRS. BREAK SHARP EDGES



MATERIAL	SEE NOTE 2.	DRAWN	DATE	TITLE		
FINISH	SEE NOTE 2.	ENGINEER	DATE	BETWEEN ADAPTOR 2.42mm MALE TO 2.4mm MALE	SCALE	SHEET
REFERENCE		APPROVED	DATE		N.S	1 of 1
		CAD FILE	DWG SIZE	DRAWING No.	REV.	
		CAD:/2.4mm	A4	N / A	X1	