

REV	DESCRIPTION	DATE	ECO	APPR
A	Register drawing	16. 8.18		

NOTE


1. Specification

- 1.1 Frequency range : DC ~ 40GHz
- 1.2 Impedance : 50 Ohm Nom.
- 1.3 VSWR : 1.10 Max. DC ~ 18GHz
  - 1.15 Max. 18 ~ 26.5GHz
  - 1.25 Max. 26.5 ~ 40GHz
- 1.4 Operating temperature : -45°C ~ 125°C

2. Material and Finish

- 2.1 Body : Passivated Stainless steel
- 2.2 Center contact : Gold Plated Beryllium copper
- 2.3 Insulator(2.92mm-F) : Ultem-1000
- 2.4 Insulator(SSMP-M) : PTFE

3. 2011/65/EU(RoHS) compliant

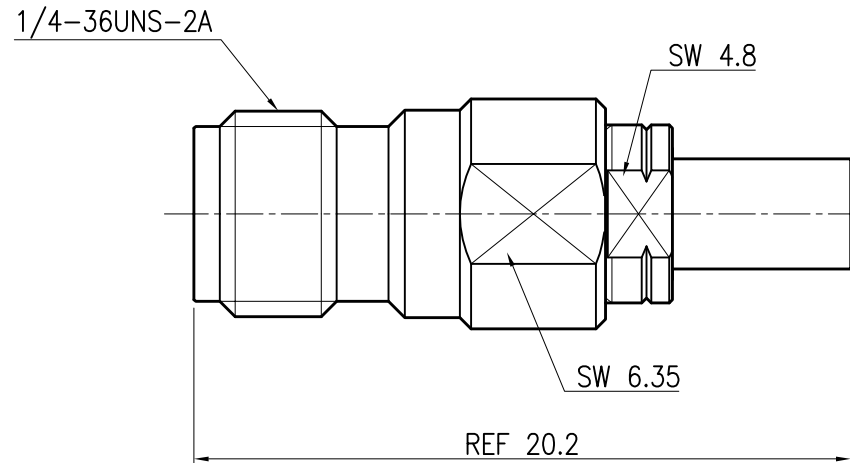

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE :

1 PLACE DECIMAL ± 0.20 mm    2 PLACE DECIMAL ± 0.10 mm    ANGLES ± 1°    1.6a

REMOVE BURRS. BREAK SHARP EDGES



MATERIAL	DRAWN	DATE	TITLE		
SEE PART LIST		2016. 8. 18	BETWEEN ADAPTOR 2.92mm FEMALE TO MINI-SMP MALE F.D		
FINISH	ENGINEER	DATE		SCALE	SHEET
SEE PART LIST			N / A	1 of 1	
REFERENCE	APPROVED	DATE			
		2016. 8. 18			
CAD FILE			DWG SIZE	DRAWING No.	REV.
CAD:/ADAPTOR/2.92mm TO SSMP			A4	AD32011-292-SM1	A