

Specification

1. Electrical data

- 1.1 Impedance : 50 Ohm Nom.
- 1.2 Frequency range : DC ~ 40GHz
- 1.3 VSWR : 1.15 Max.


2. Mechanical data

- 2.1 Durability : 500 cycles Min.
- 2.2 Temperature range : -45°C ~ 85°C

3. Material and Finish

- 3.1 Body : Passivated Stainless steel
 - 3.2 Center Contact : Gold plated Beryllium-copper
 - 3.3 Insulator : Ultem-1000
 - △ 3.4 Coupling nut : Passivated Stainless steel
 - 3.5 Lock ring : Passivated Stainless steel
4. 2011/65/EU(RoHS) compliant

REV	DESCRIPTION	DATE	ECO	APPR
A	Register drawing	16. 7.13		
B	Changed Shape Coupling nut	16. 8.08		

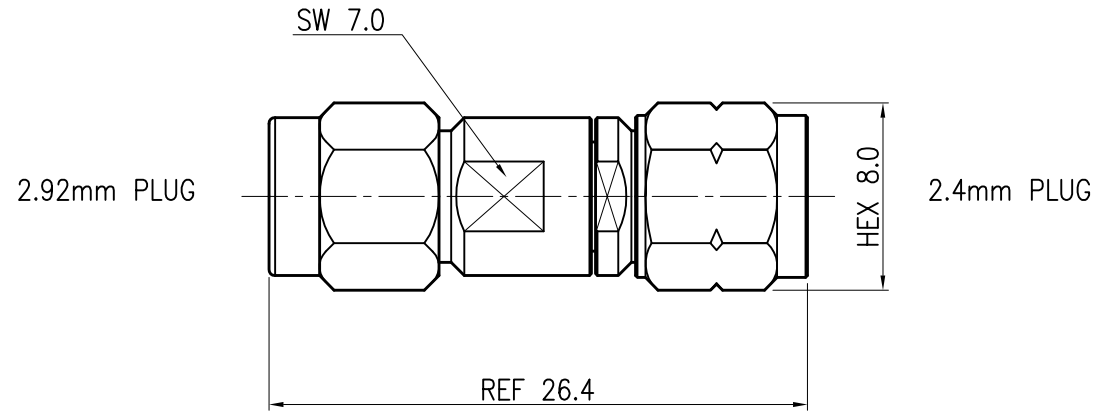

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE :

1 PLACE DECIMAL ± 0.20 mm 2 PLACE DECIMAL ± 0.10 mm ANGLES ± 1° 1.6a

REMOVE BURRS. BREAK SHARP EDGES



MATERIAL SEE PART LIST	DRAWN	DATE	TITLE BETWEEN ADAPTOR 2.92mm MALE TO 2.4mm MALE	
	FINISH SEE PART LIST	ENGINEER		
REFERENCE	APPROVED	DATE	SCALE	SHEET
	CAD FILE CAD:/ADAPTOR/2.92mm TO 2.4mm	2016. 7.13	N / A	1 of 1
		DWG SIZE A4	DRAWING No. AD32008-291-241	REV. B