| REV | DECRIPTION | DATE | ECO | APPR |
|---|---|---|---|---|
| A | Register drawing | 17. 2.16 | | |
| B | Changed Specification | 17. 4.10 | | |

NOTE

1. Specification
   - 1.1 Frequency range : DC ~ 40GHz
   - 1.2 Impedance : 50 Ohm Nom.
   - △B 1.3 VSWR 1.30 : 1 Max. up to 40GHz
   - 1.4 Operating temperature : -45℃ ~ 125℃
2. Material and Finish
   - 2.1 Body, Coupling nut : Passivated Stainless steel
   - 2.2 Center contact : Gold Plated Beryllium copper
   - 2.3 Insulator(2.92mm) : ULTEM
   - 2.4 Insulator(SMP) : PTFE
   - 2.5 Lock ring : Passivated Stainless steel
   - 2.6 Gasket : Silicone rubber
   - 2.7 Anti lock ring : Gold Plated Beryllium copper
3. 2011/65/EU(RoHS) compliant

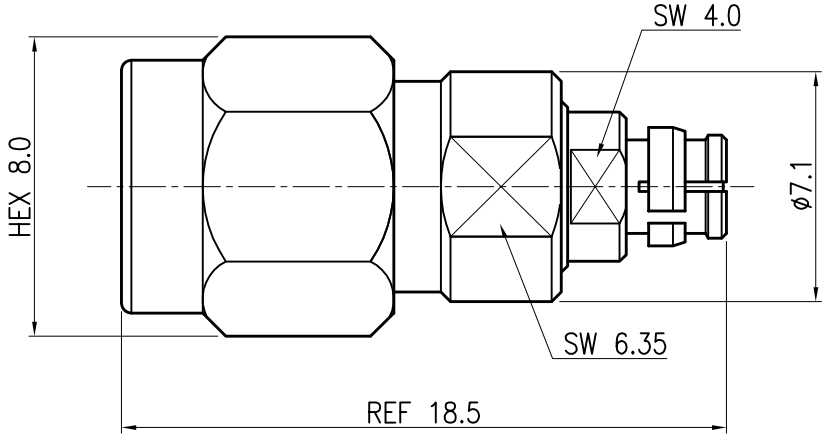


UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE ;

| 1 PLACE DECIMAL | 2 PLACE DECIMAL | ANGLES |
|---|---|---|
| ± 0.20 mm | ± 0.10 mm | ± 1° |

1.6 a

REMOVE BURRS. BREAK SHARP EDGES

ENS MICROWAVE LLC

| | | | |
|---|---|---|---|
| MATERIAL: SEE PART LIST | DRAWN: | DATE: 2016. 12. 31 | TITLE: BETWEEN ADAPTOR 2.92mm MALE TO SMP FEMALE |
| FINISH: SEE PART LIST | ENGINNER: | DATE: | |
| REFERENCE: | APPROVED: | DATE: 2016.12. 31 | |
| | CAD FILE: CAD:/ADAPTOR/2.92mm TO SMP | DWG SIZE: A4 | |

| SCALE | SHEET | DRAWING No. | REV. |
|---|---|---|---|
| N.S | 1 of 1 | AD33021-291-SP2 | B |