




14 Commerce Dr, Danbury, CT 06810
Sales@ensmicro.com

T: 203-794-7940 F: 203-794-7941
www.ensmicro.com

D218 CABLE

CRUSH RESISTANCE: 100 lb/in.

CABLE CROSS SECTION

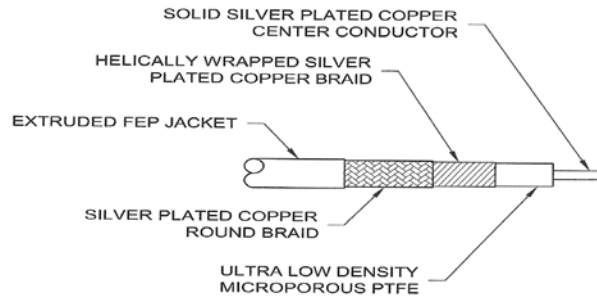

Max. Frequency (GHz)	18
Vel. Of Propagation %	84
RF Leakage at 18 GHz` (dB)	>-100
Max. Voltage (kV)	15
Capacitance (pF/ft.)	24
Cable OD (Inches)	0.300
Bend Radius (Inches)	1.5
Weight (Lb/100 ft.)	9
Center Conductor type	Solid
k1:	3.86
k2:	0.3

Cable Attenuation (dB/100ft.)= $k_1 \cdot \sqrt{f} + k_2 \cdot f$

Cable Assembly Loss (dB)= $(k_1 \cdot \sqrt{f} + k_2 \cdot f) / 1200 \cdot l$ + Connector 1 Loss + Connector 2 Loss

Connector Loss:

Connector Type	Straight	Right Angle
SMA	$.005 \cdot \sqrt{f} + .01 \cdot f$	$.014 \cdot \sqrt{f} + .013 \cdot f$
N	$.004 \cdot \sqrt{f} + .01 \cdot f$	$.013 \cdot \sqrt{f} + .013 \cdot f$
TNC	$.004 \cdot \sqrt{f} + .01 \cdot f$	$.013 \cdot \sqrt{f} + .013 \cdot f$

f is frequency in GHZ



VSWR Specifications:

- 1.35:1 for assemblies with 2 straight connectors.
- 1.40:1 for assemblies with 1 straight and 1 right angle connector.
- 1.45:1 for assemblies with 2 right angle connectors.

ENSMICROWAVE LLC

14 Commerce Dr, Danbury, CT 06810
Sales@ensmicro.com

T: 203-794-7940 F: 203-794-7941
www.ensmicro.com

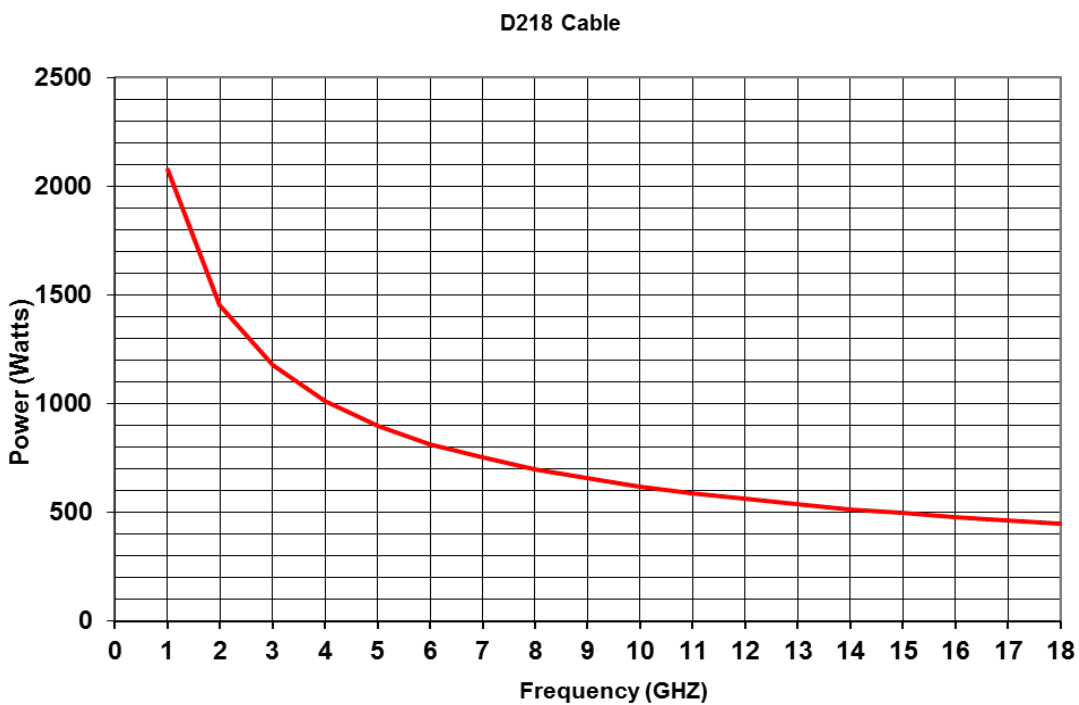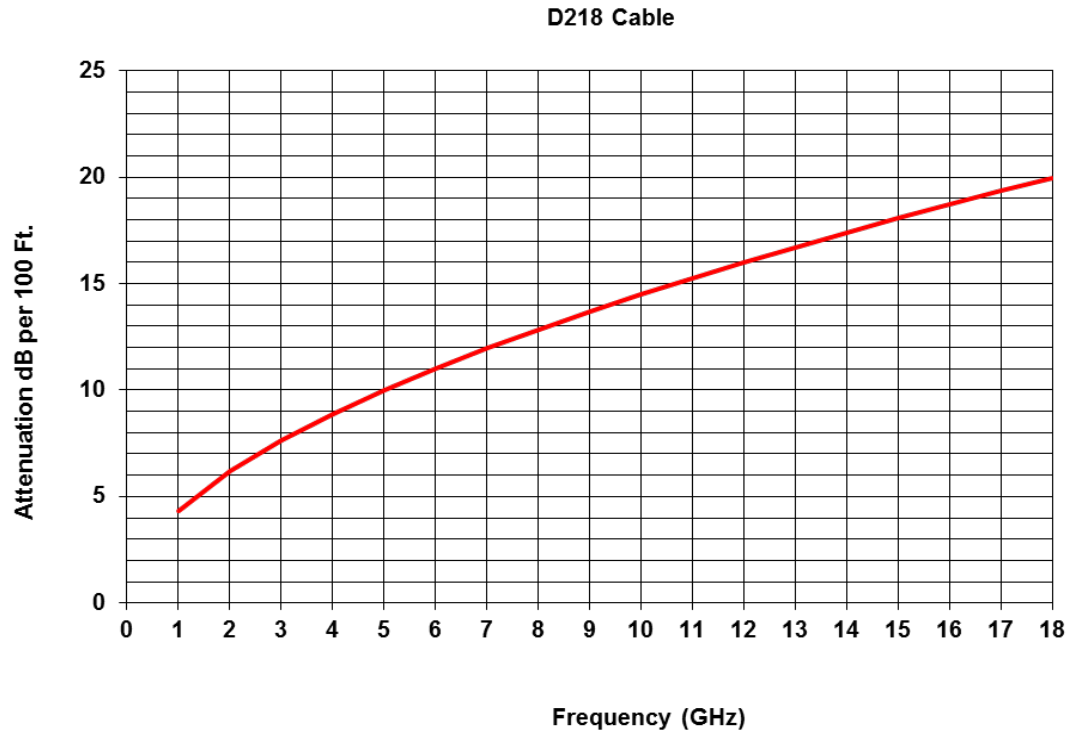

Max. Avg Power at sea level and 20 deg C. VSWR 1:1