

NOTE

1. Specification


- 1.1 Frequency range : DC ~ 26.5GHz
- 1.2 Impedance : 50 Ohm Nom.
- 1.3 VSWR : 1.15 Max(18GHz) / 1.20 Max(26.5GHz)
- 1.4 Operating temperature : -45°C ~ 125°C

2. Material and Finish



- 2.1 Body(SMA-M), Coupling nut : Passivated Stainless steel
- 2.2 Body(SMP-F), Center contact : Gold Plated Beryllium copper
- 2.3 Insulator : PTFE
- 2.4 Lock ring : Passivated Stainless steel
- 2.5 Anti lock ring : Gold Plated Beryllium copper
- 2.6 Gasket : Silicone rubber

3. 2011/65/EU(RoHS) compliant

REV	DESCRIPTION	DATE	ECO	APPR
A	Register drawing	17. 2.16		

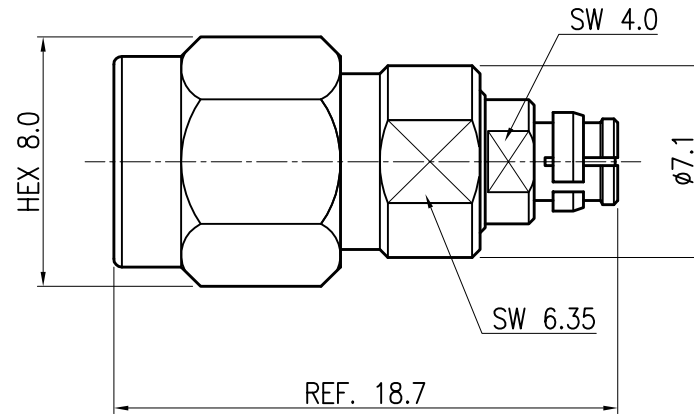

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE :

1 PLACE DECIMAL ± 0.20 mm    2 PLACE DECIMAL ± 0.10 mm    ANGLES ± 1°    1.6 a  

REMOVE BURRS. BREAK SHARP EDGES



MATERIAL	DRAWN	DATE	TITLE		
SEE PART LIST		2017. 2. 16	BETWEEN ADAPTOR SMA MALE TO SMP FEMALE		
FINISH	ENGINEER	DATE		SCALE	SHEET
SEE PART LIST			N.S	1 of 1	
REFERENCE	APPROVED	DATE			
		2017. 2. 16			
CAD FILE			DWG SIZE	DRAWING No.	REV.
CAD:/ADAPTOR/SMA TO SMP			A4	AD33019-A01-SP2	A